


Grizzly Wireless Wellhead Recorder

Grizzly Features:

- Embedded Battery Pack (1)
- Wireless Communication (2)
- Interfaces with RTM's Handheld Device
- Seamless Welded Construction (3)
- Real Time Clock
- View Data Remotely Through RTM's Website in Locations with Cell Phone Access

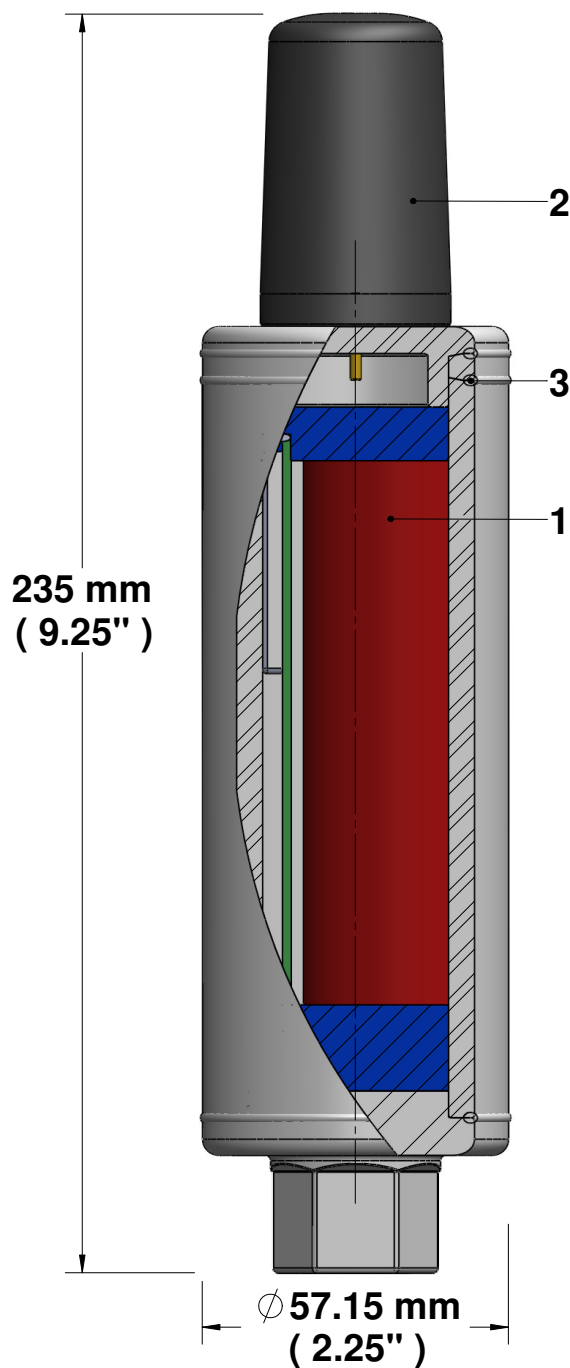

Specifications	Pressure	Temperature
Accuracy	0.021% F.S.	0.2°C
Resolution	0.0003% F.S.	0.0001°C
Drift	0.01/year	0.02%/year
Transducer	Piezo-resistive silicon	
Battery Type	Lithium	
Battery Capacity	30Ah	
Battery Voltage	3.6V	
Battery Life	2 years ^[1]	
Memory Capacity	1 175 552 samples ^[2]	
Sample Rate	1 sample/second to 1 sample/hour	
Housing Material Type	17-4 Stainless Steel or Inconel	
External Connection	1/2" - 13	

[1] Based on average use and results from long term testing.

[2] Upgradeable to 2 519 040 samples upon request.

Pressure psi (kPa)	Max. Temperature °C	Part No.
0-750 (5 171)	-40 to 85	A-7231
0-1500 (10 342)	-40 to 85	A-7232
0-3000 (20 684)	-40 to 85	A-7233
0-6000 (41 368)	-40 to 85	A-7234
0-10000 (68 497)	-40 to 85	A-7234
0-15000 (103 421)	-40 to 85	A-7235

Accessories	Part No.
RTM Handheld Data Management Device	A-1001
HF6 to 1/2" NPT	A-1401
HF6 to 3/4" NPT	A-1402
Grizzly Case Assembly	A-3687
Lithium Grease	M-1817
1 1/16 Wrench Set	M-1818